


ВЗРЫВОЗАЩИЩЕННЫЕ ЭЛЕКТРОДВИГАТЕЛИ

Габаритные, установочные и присоединительные размеры

Габаритный чертеж IM 2001 / IM B35.

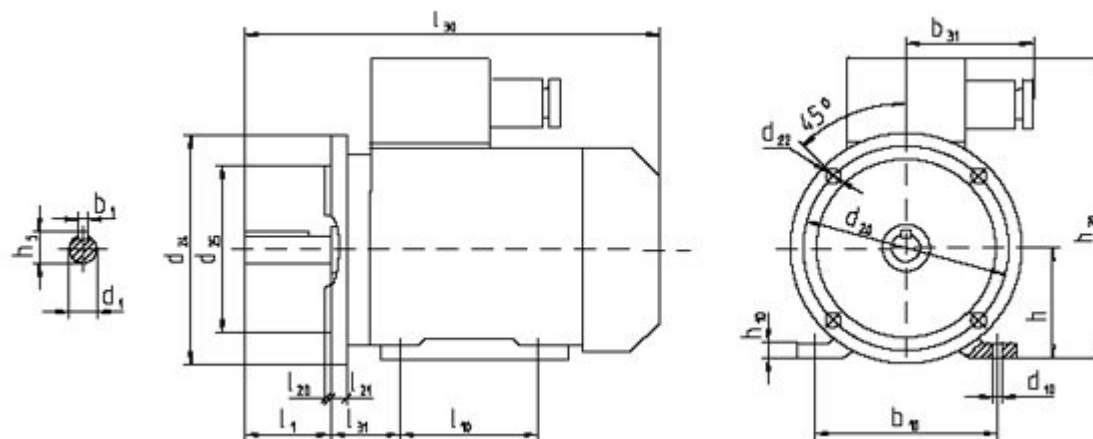

Размеры в мм.

Тип	Число полюсов	l_{30}	h_{31}	b_{31}	d_{24}	l_1	l_{10}	l_{20}	l_{21}	l_{31}	d_1	d_{10}	d_{20}	d_{22}	d_{25}	b_1	b_{10}	h	h_5	h_{10}
BA,BAБ,BAK100S	2,4	420/435	345	165	250	60	112	4	15	63	28	12	215	15	180	8	160	100	31,0	14
BA,BAP132S2,SA4,S4,SA6,SB6	2,4,6	545/560	460	200	350	80	140	5	14	89	38	12	300	19	250	10	216	132	41	20
BA,BAP132S6	6	590/605	460	200	350	80	140	5	14	89	38	12	300	19	250	10	216	132	41	20
BA,BAP132M	2,4,6	590/605	460	200	350	80	178	5	14	89	38	12	300	19	250	10	216	132	41	20
BA,BAP160S	2	605/630	520	230	350	110	178	5	15	108	42	15	300	19	250	12	254	160	45	20
BA,BAP160M	2	645/670	520	230	350	110	210	5	15	108	42	15	300	19	250	12	254	160	45	20
BA,BAP160S	4,6,8	605/630	520	230	350	110	178	5	15	108	48	15	300	19	250	14	254	160	51,5	20
BA,BAP160M	4,6,8	645/670	520	230	350	110	210	5	15	108	48	15	300	19	250	14	254	160	51,5	20

BA180S	2	645	500	230	400	110	203	5	15	121	48	15	350	19	300	14	279	180	51,5	23
BA180M	2	705	500	230	400	110	241	5	15	121	48	15	350	19	300	14	279	180	51,5	23
BA180S	4	645	500	230	400	110	203	5	15	121	55	15	350	19	300	16	279	180	59	23
BA180M	4,6,8	705	500	230	400	110	241	5	15	121	55	15	350	19	300	16	279	180	59	23
BA200M	2	890	590	230	450	110	267	5	16	133	55	19	400	19	350	16	318	200	59	28
BA200L	2	890	590	230	450	110	305	5	16	133	55	19	400	19	350	16	318	200	59	28
BA200M	4	920	590	230	450	140	267	5	16	133	60	19	400	19	350	18	318	200	64	28
BA200L	4	920	590	230	450	140	305	5	16	133	60	19	400	19	350	18	318	200	64	28
BA200M	6,8	830	590	230	450	140	267	5	16	133	60	19	400	19	350	18	318	200	64	28
BA200L	6,8	920	590	230	450	140	305	5	16	133	60	19	400	19	350	18	318	200	64	28
BRA200LA	2	800	590	230	400	110	305	5	16	133	55	19	350	19	300	16	318	200	59	28
BRA200LB	2	890	590	230	400	110	305	5	16	133	55	19	350	19	300	16	318	200	59	28
BRA200L	4,6,8,12	800	590	230	400	110	305	5	16	133	55	19	350	19	300	16	318	200	59	28
BRA225M	2	890	615	230	450	110	311	5	16	149	55	19	400	19	350	16	356	225	59	31
BRA225S	4	920	615	230	450	140	286	5	16	149	60	19	400	19	350	18	356	225	64	31
BRA225M	4	920	615	230	450	140	311	5	16	149	60	19	400	19	350	18	356	225	64	31
BRA225M	6	920	615	230	450	140	311	5	16	149	60	19	400	19	350	18	356	225	64	31
BRA225S	8	830	615	230	450	140	286	5	16	149	60	19	400	19	350	18	356	225	64	31
BRA225M	8	920	615	230	450	140	311	5	16	149	60	19	400	19	350	18	356	225	64	31

В двигателях H200-225 количество отверстий d 22 - 8